




## CARGO-LIFT

### —Steel Plate Clamp



**Steel Plate Clamp** has three types: **Single Steel Plate Lifting Clamp**, **L-Clamp** and **Overturn Clamp**. They are used for horizontal lifting or overturning steel plates in one piece or several pieces.

#### Single Steel Plate Lifting Clamp

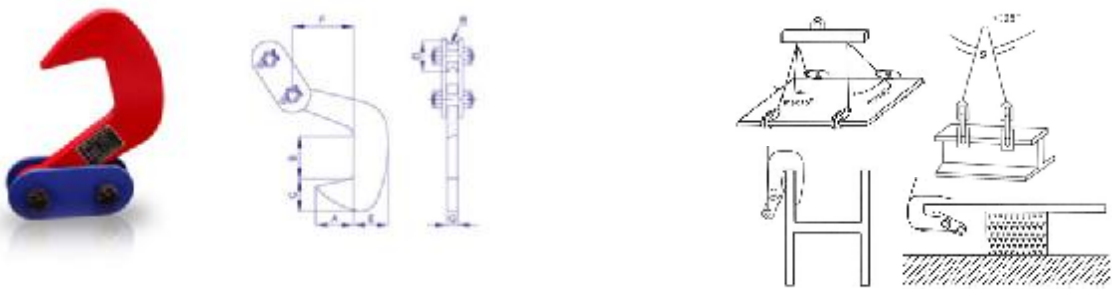

\*Using for lifting steel plates of one or some.

\*The rated load means the maximum weight which be sustained by clamps with the Included Angle Of 60 The Two Legs.

\*Hoisting operations in Group 4 complementary, and must be set to use balance beam, In the process of being lifted onto a collision can not be suspended.


\*Automatically link

\*The proof load is 2 times working load limit, the breaking load Is 4 times working load limit.

Model	Rated Load (t)	Plate Thickness (mm)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	R (mm)
DCQA3	3	30-90	102	90	68	78	84	168	25	9
DCQA5	5	40-100	108	100	73	88	97	172	30	11



### L Clamp



\*Using for lifting steel plate levely.

\*In the process of being lifted onto a collision can not be suspended.


\*The rated load means the maximum weight which be sustained by clamps with the included angle of 60° the two legs.

\*Hoisting operations in Group 4 complementary, and must be set to use balance beam.

\*The proof load is 2 times working load limit, the breaking load is 4 times working load limit.

Model	Rated Load (t)	Plate Thickness (mm)
L0.75	0.75	0-15
L1.5	1.5	0-25
L2.5	2.5	25-50
L5	5	50-90

### Overturn Clamp



\*Using for lifting steel plates level and steel plate or steel for overturn.

\*In the process of being lifted onto a collision can not be suspended.

\*Allowed for lifting of a single flip clamp is the maximum weight, the lifting operation can use single.

\*You must add balance beam when it is lifted level.

\*The proof load is 2 times working load limit, the breaking load is 4 times working load limit.

Model	Rated Load (t)	Plate Thickness (mm)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	H (mm)
DFQ1.5	1.5	0-20	80	43	153	30	80	205
DFQ2.5	2.5	0-30	105	52	190	35	90	270
DFQ5	5	10-40	136	82	247	46	114	380



**UNITED-PORTS**  
One Call, Total Delivery

Contact us



**UNITED-PORTS**  
One Call, Total Delivery

**United-Ports (Shanghai) LTD.**

Add: No. 3293, South Hongmei Rd,  
Minhang District, Shanghai, China

TEL: 86-21-34634180

FAX: 86-21-34625293

Web: [www.cargo-protec.com.cn](http://www.cargo-protec.com.cn)

Mail: [info@united-ports.com](mailto:info@united-ports.com)