



UNITED-PORTS
One Call, Total Delivery

CARGO-LIFT


— Swivel Hoist Rings




Swivel Hoist Ring is center-pull traditional style. It can be fixed on objects and devices, used with sling fitting for lifting, pulling and revolving objects. It has two types: **General type** and **Long Clevis Hoist Ring**.

Product Features

- *Full 360° Swivel and 180° Pivot Action
- *Rated at 5:1 Strength Factor
- *Material: Alloy Steel
- *Finish: Black Oxide (Except Washer)
- *Clevis, Bolt, Pins, Base, Washer and Bushing are magnetic |
- *Washer: golden Zinc Plated with clear conversion coating
- *200% Proof Tested
- * Made in U.S.A. With the original test certificate attached

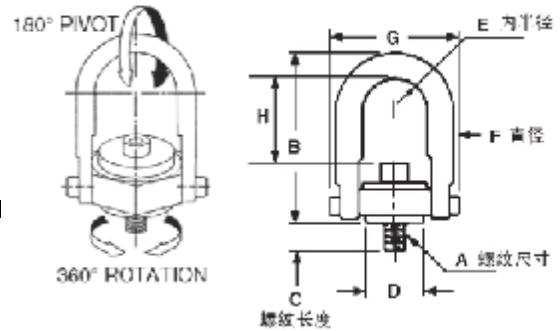

Notice

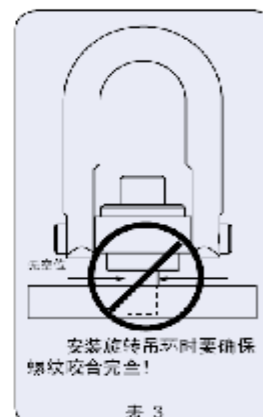

Specification

Center-Pull Style Hoist Rings (Imperial)

Model	Capacity (Kg)	Thread Size (Inch)	C Length (Inch)	Torque (Ft.Lbs)	B (Inch)	D (Inch)	E (Inch)	F (Inch)	G (Inch)	H (Inch)
23406	800	5/16-18	9/16	7	2.67	0.75	0.43	0.38	1.84	11/4



UNITED-PORTS
One Call, Total Delivery

23408	1000	3/8-16	9/16	12	2.67	0.75	0.43	0.38	1.84	11/4
23410	2500	1/2-13	1 1/16	28	3.75	1.20	0.69	0.50	2.56	125/32
23413	2500	1/2-13	1 1/4	28	4.78	1.50	0.88	0.75	3.52	23/8
23415	4000	5/8-11	1 1/4	60	4.78	1.50	0.88	0.75	3.52	21/4
23418	5000	3/4-10	1 1/2	100	4.78	1.50	0.88	0.75	3.52	21/8
23421	7000	3/4-10	1 1/2	100	6.52	2.31	1.40	1.00	5.14	215/16
23424	8000	7/8-9	1 1/4	160	6.52	2.31	1.40	1.00	5.14	213/16
23426	10000	1-8	1 1/2	230	6.52	2.31	1.40	1.00	5.14	211/16
23427	10000	1-8	2 1/4	230	6.52	2.31	1.40	1.00	5.14	211/16

Center-Pull Style Hoist Rings (Metric)

Model	Capacity (Kg)	Thread Size (Inch)	C Length (Inch)	Torque (Ft.Lbs)	B (Inch)	D (Inch)	E (Inch)	F (Inch)	G (Inch)	H (Inch)
23456	400	M8×1.25	12.5	1.0	67.8	19.0	10.9	9.7	46.7	32.0
23458	450	M10×1.50	17.5	1.7	67.8	19.0	10.9	9.7	46.7	30.0
23462	1050	M12×1.75	19.0	3.8	123.0	38.1	22.4	19.0	89.4	60.5
23465	1900	M16×2.0	29.0	8.2	123.0	38.1	22.4	19.0	89.4	56.5
23468	2150	M20×2.5	34.0	13.6	123.0	38.1	22.4	19.0	89.4	52.5
23471	3000	M20×2.5	32.0	13.6	163.0	58.7	35.6	25.4	130.6	73.0
23474	4200	M24×3.0	37.0	31.0	163.0	58.7	35.6	25.4	130.6	69.0
23479	7000	M30×3.5	66.0	60.0	221.7	81.0	44.5	31.7	165.1	107.4
23483	11000	M36×4.0	68.0	100.0	316.7	106.4	57.2	44.4	217.2	166.5

Center-Pull Style Hoist Ring Long Clevis (Metric)

Model	Capacity (Kg)	Thread Size(Inch)	Length (Inch)	Torque (Ft.Lbs)	B (Inch)	D (Inch)	E (Inch)	F (Inch)	G (Inch)	H (Inch)
23562	1050	M12×1.75	19.0	3.8	108	38.1	22.4	19.0	89.4	108
23565	1900	M16×2.0	29.0	8.2	106	38.1	22.4	19.0	89.4	106
23568	2150	M20×2.5	34.0	13.6	101	38.1	22.4	19.0	89.4	101
23571	3000	M20×2.5	32.0	13.6	101	58.7	35.6	25.4	130.6	101
23574	4200	M24×3.0	37.0	31.0	111	58.7	35.6	25.4	130.6	111

Center-Pull Style Hoist Ring Long Clevis (Imperial)

Model	Capacity (Kg)	Thread Size (Inch)	Thread Length (Inch)	Torque (Ft.Lbs)	B (Inch)	D (Inch)	E (Inch)	F (Inch)	G (Inch)	H (Inch)
23511	2500	1/2-13	3/4	28	6.72	1.50	0.88	0.75	3.52	41/4
23512	2500	1/2-13	1	28	6.72	1.50	0.88	0.75	3.52	41/4
23513	2500	1/2-13	1 1/4	28	6.72	1.50	0.88	0.75	3.52	41/4
23514	4000	5/8-11	1	60	6.72	1.50	0.88	0.75	3.52	43/16
23515	4000	5/8-11	1 1/4	60	6.72	1.50	0.88	0.75	3.52	43/16



UNITED-PORTS
One Call, Total Delivery

23517	5000	3/4-10	1	100	6.72	1.50	0.88	0.75	3.52	4
23518	5000	3/4-10	1 1/2	100	6.72	1.50	0.88	0.75	3.52	4
23520	7000	3/4-10	1	100	8.11	2.31	1.40	1.00	5.14	4
23521	7000	3/4-10	1 1/2	100	8.11	2.31	1.40	1.00	5.14	43/8
23523	8000	7/8-9	1	160	8.11	2.31	1.40	1.00	5.14	43/8
23524	8000	7/8-9	1 1/4	160	8.11	2.31	1.40	1.00	5.14	43/8
23525	10000	1-8	1 1/4	230	8.11	2.31	1.40	1.00	5.14	43/8
23526	10000	1-8	1 1/2	230	8.11	2.31	1.40	1.00	5.14	43/8
23527	10000	1-8	2 1/4	230	8.11	2.31	1.40	1.00	5.14	43/8

Contact us



UNITED-PORTS
One Call, Total Delivery

United-Ports (Shanghai) LTD.

Add: No. 3293, South Hongmei Rd,
Minhang District, Shanghai, China

TEL: 86-21-34634180

FAX: 86-21-34625293

Web: www.cargo-protec.com.cn

Mail: info@united-ports.com