

CARGO-MOVE

-Wheel Chock



Wheel Chock is designed according to the wheel width, matching with the wheels' radian, prevent wheel s from

sliding. Before the cargo loading and unloading is finished, the truck mustn't leave the platform, or it will cau se

great danger to the operators, forklift and cargo. Wheel chocks are necessarily used.

Product Features

*An automobile equipped tool in emergency repair.

*It is made of high-strength rubber, with good compression resistance and some flexibility.

*Special technology to ensure its lasting color, no fading away.

*Ensure the vehicles staying firmly when break down or stop on any roads or ramps


*5m zinc-plated chain can be equipped to facilitate drawing out.



Specification

Model	Size L*W*H(cm)	Combination Parts
8-88 Laminated		6mm-thick Rubber
Rubber	23.5×23.5×23.5	19mm×229mm steel pole
/5m chain		6mm-thick end steel board

Contact us

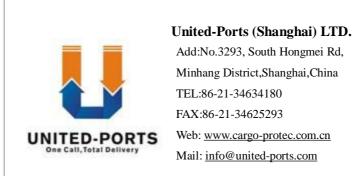

Add:No.3293, South Hongmei Rd, Minhang District, Shanghai, China TEL:86-21-34634180 FAX:86-21-34625293 Web: www.cargo-protec.com.cn Mail: info@united-ports.com